


Dimensions

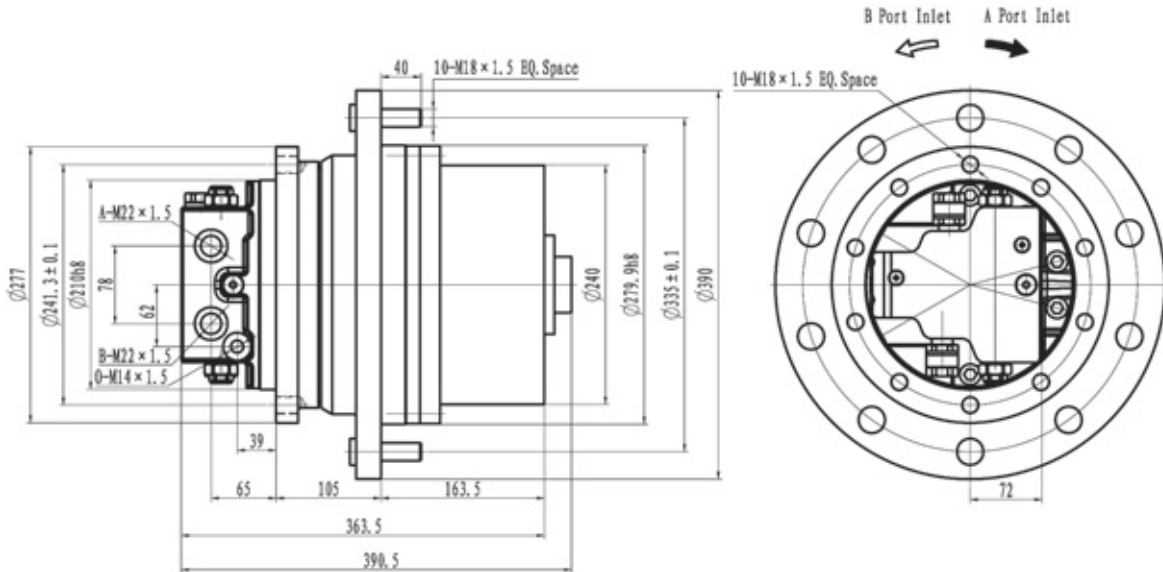

Specification

| Output Torque (N · m) | | Ratio | Brake | | | Hydraulic Motor | | | |
|-----------------------|-------|--------|-----------------------|-----------------------|--------------------|-----------------------------|-----------------------------|---------------------|------------------|
| Continuous | Max. | | Static Torque (N · m) | Initial Release (MPa) | Full Release (MPa) | Large Displacement (ml/rev) | Small Displacement (ml/rev) | Max. Pressure (MPa) | Max. Speed (rpm) |
| 9000 | 18000 | 80 | 230 | 1.2 | 1.8 | 53 | 12 | 28 | 3000 |
| | | 77.449 | 230 | | | | | | |
| | | 69.857 | 260 | | | | | | |

1. The product can be fitted with KC/LC series plug-in hydraulic motor from Sauer-Danfoss.
2. The product can be used in closed loop system.
3. The product is equipped with a mechanical disconnecting device for being towed without damaging if necessary.

